

GOBI ADJUSTABLE ROOF RACK CROSS BAR INSTALLATION INSTRUCTIONS

Guidelines:

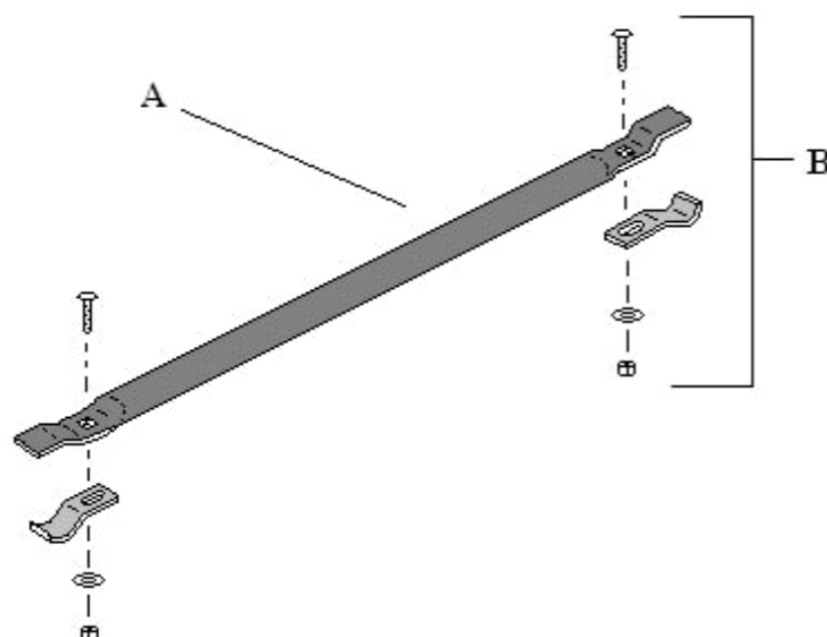
When using Load Carriers and Accessories, the user must understand the precautions. The points listed below will assist you in using the rack /carrier system and will encourage safety.

- For quality fits and safty, use only the recommended rack or accessory. Do not assume an accessory will fit, always check with dealer when obtaining new accessories. Use only approved accessories on load carriers. Using other brands will void your warrenty.
- Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened and locked before every trip. Knobs, bolts, screws, straps, and locks must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during the trip to insure continued fastening security.
- Check local and state laws governing projection of objects beyound the width of a vehicle. **Be aware of the width and height of your cargo since low clearance branches, bridges, and parking garages can affect the load** All cargo will affect the vehicle's driving behavior. Never drive with any lock, know, or rack in an open or unlocked position. All long loads such as, but not limited to sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks, of the vehicle.
- Remove your rack accessories when they are not in use, before intering car washes, prior to taking in your vehicle for service, and whenever clearance may be an issue.
- All locks must be turned and moved periodically to insure smooth operation. Use graphite or similar dry lubricant to help this. Locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended for an extended period. Place at least one key in the glove compartment.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use load carriers and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity.
- Consult with your dealer if you have any questions regarding the operations and limits of this product. Review all instructions carefully.

GOBI ADJUSTABLE ROOF RACK CROSS BAR INSTALLATION INSTRUCTIONS

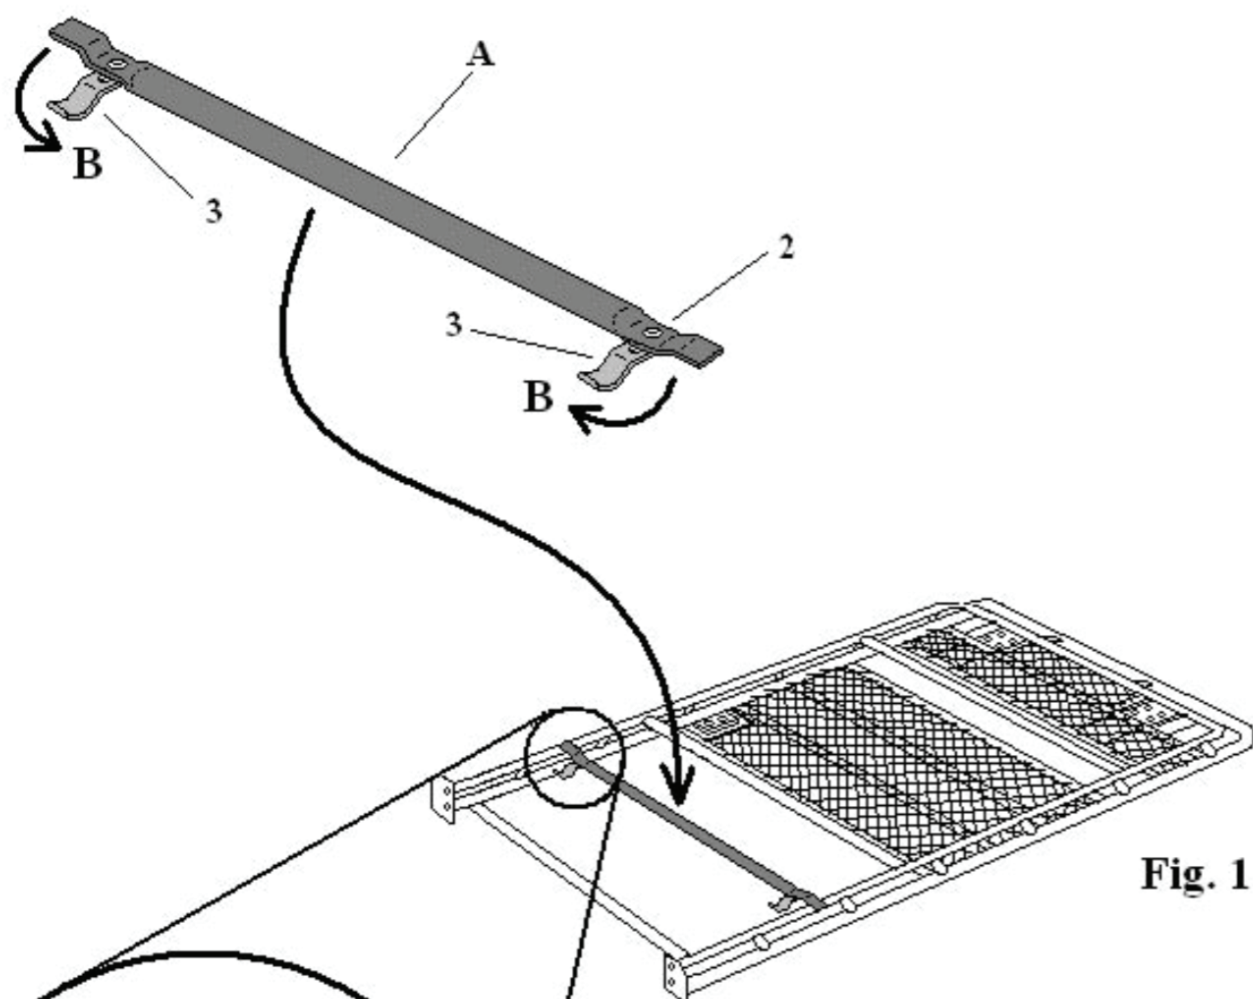
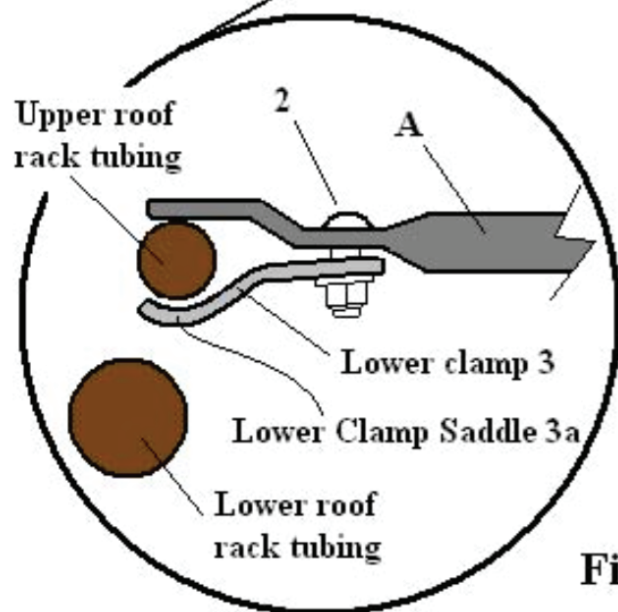
Included in kit

Letter	Description	Location	Quantity
A	ADJUSTABLE ROOF RACK CROSS BAR	Main box	1
B	GOBI CROSS BAR HARDWARE CONTENTS: 2- 3/8" x 1-1/4" SS Carriage bolts 2- 3/8" Hard washer yellow zinc 2- 3/8" Nylock nut 2- Lower clamp plate	Pre-assembled	1



CAUTION: MAXIMUM CROSS BAR WEIGHT LIMIT 175 LBS. (79.38kg) per cross bar

GOBI ADJUSTABLE ROOF RACK CROSS BAR INSTALLATION INSTRUCTIONS

**Fig. 1****Fig. 1a**

GOBI ADJUSTABLE ROOF RACK CROSS BAR INSTALLATION INSTRUCTIONS

Installation instructions:

- 1- Using the hardware list on page 2 check and verify that all hardware is present prior to installation.
- 2- Tools needed 1- 9/16" open and closed box end wrench.
- 3- Refer to page 3 Fig. 1 and Fig. 1a and loosen both 3/8-16 carriage bolts (2) then swing clamps (3) horizontal to cross bar. Do not remove bolts (2) at this time leave loose.
- 4- Refer to Fig. 1 and Fig. 1a - place adjustable cross bar "A" at any point over the roof racks upper outer perimeter tubing from passenger to driver's side or visa-versa as shown. Once cross bar "A" is in place on the roof rack rotate lower clamp (3) directly under upper perimeter tubing and in line with adjustable cross bar "A" as shown in Fig. 1a both ends. Secure lower clamp (3) so that the curve portion or saddle (3a) of the lower clamp (3) is mated with the underside of the upper roof rack tubing as shown in Fig. 1a. You may need to slide clamp (3) towards or away from the ends of the cross bar "A" to accommodate a secure and proper fit then snug down bolts (2) but do not fully tighten at this time. Provide the same procedure to the opposite end of cross bar "A". Line up adjustable cross bar "A" with any of the welded in roof rack tubing then fully tighten bolts (2) both ends using a 9/16" open end wrench. Installation completed.
- 5- Multiple cross bars can be mounted on roof rack. Cross Bar maximum weight limit is 175 lbs. (79.38kg).