



GOBI JEEP JL ROOF RACK WITH SOFT TOP




GOBI JEEP JL ROOF RACK WITH SOFT TOP



GOBI JEEP JL ROOF RACK WITH SOFT TOP




Fully loosen all 4 lower rear isolator screws both passenger and driver sides as shown

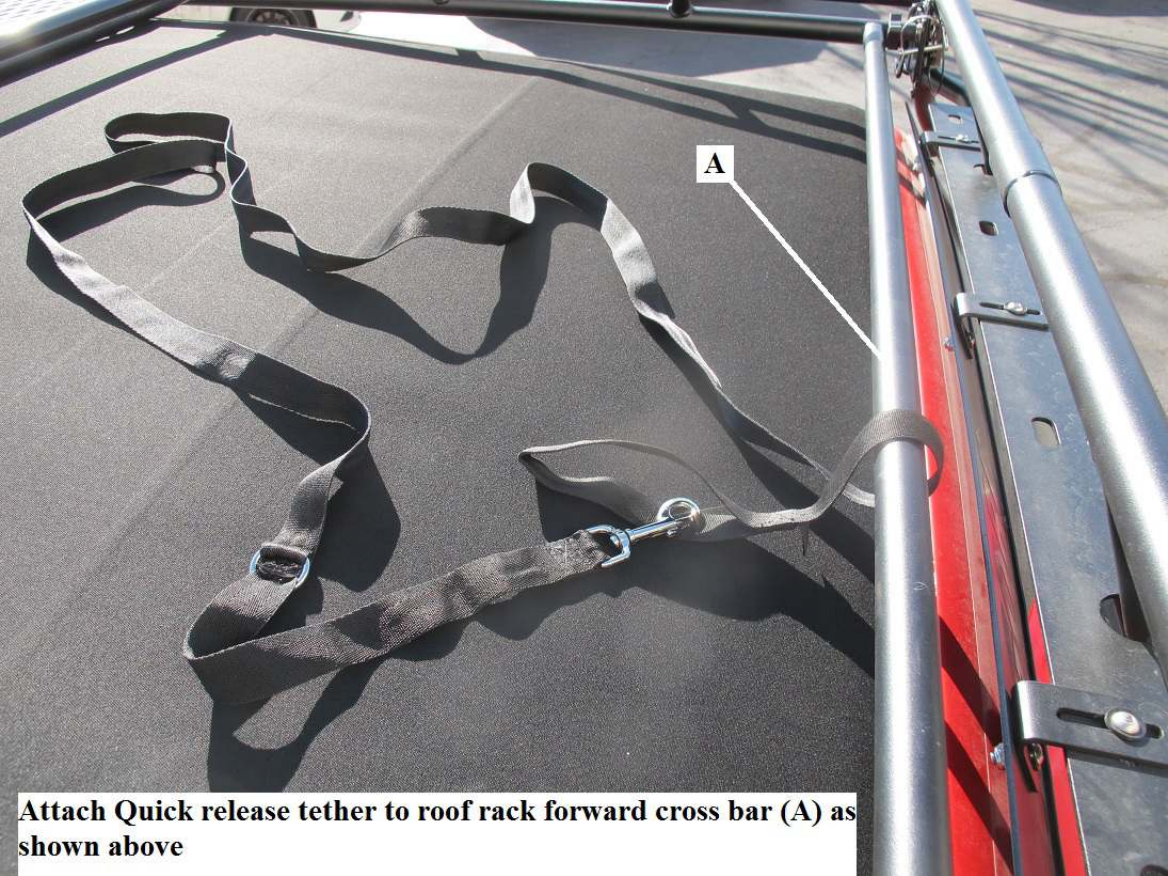

A

Attach Quick release tether to roof rack forward cross bar (A) as shown above



Pull tether tight around roof rack cross bar (A)

A

B


Wrap opposite end of tether to light bar (B) as shown



Secure tether swival hook to "D" ring as shown

Swival hook

"D" Ring

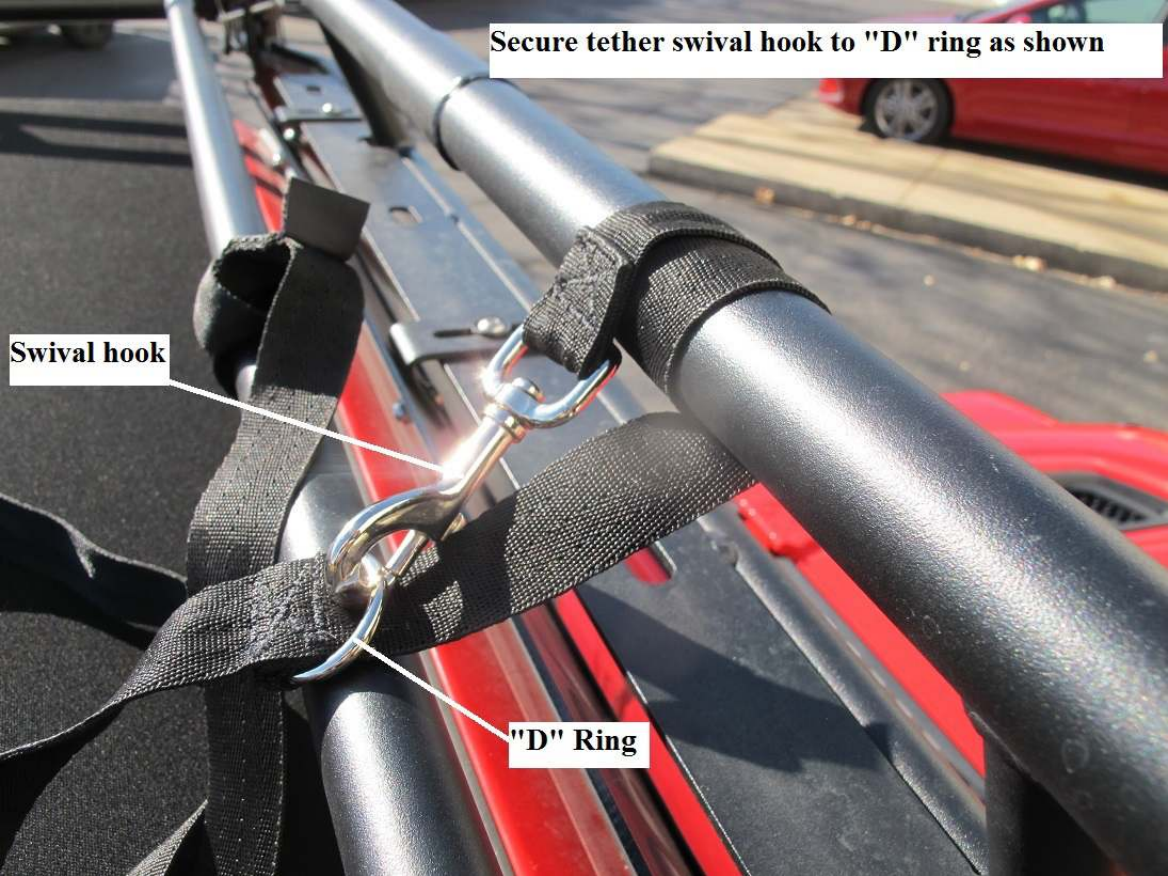



B

Safety Pin


Disconnect safety pin and hang forward of light bar (B)

Support plate (E)

Safety plate (C)

Knob (F)

Slide safety plate (C) away from roof rack support plate (E) and secure in place with knob (F) both driver and passenger sides

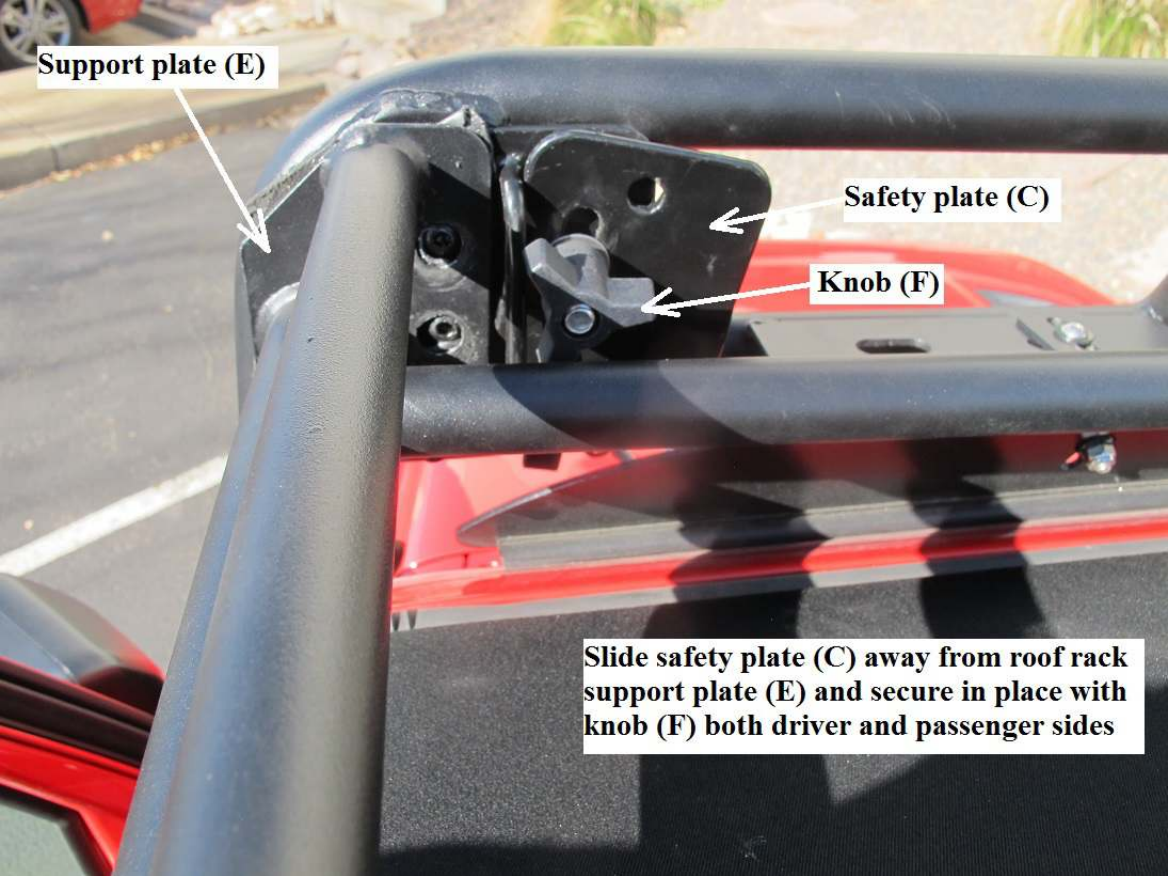



Pull back on roof rack and let hang from tether as shown



**Gobi rack pulled back for
soft top retraction**

**Unlatch soft top from inside and
push back as shown**



**Gobi rack pulled back for soft
top retraction**



Gobi rack pulled back for soft top retraction



**Remove rear window for soft
top retraction**



**Remove driver side window for
soft top retraction**



**Remove passenger side window
for soft top retraction**



Retract complete soft top





Full soft top retraction

**Return Gobi rack back down behind
light bar and secure in place**



**Gobi rack returned to secured
position behind light bar**



**Gobi rack returned back down to
secured position behind light bar**





Gobi rack and soft top returned back to covered position and secured in place under 5 minutes