

GOBI JL SKY ONE ROOF RACK MINI WIND DEFLECTORS INSTALLATION INSTRUCTIONS

Guidelines:

When using Load Carriers and Accessories, the user must understand the precautions. The points listed below will assist you in using the rack /carrier system and will encourage safety.

- For quality fits and safety, use only the recommended rack or accessory. Do not assume an accessory will fit, always check with dealer when obtaining new accessories. Use only approved accessories on load carriers. Using other brands will void your warranty.
- Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened and locked before every trip. Knobs, bolts, screws, straps, and locks must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during the trip to insure continued fastening security.
- Check local and state laws governing projection of objects beyond the width of a vehicle. **Be aware of the width and height of your cargo since low clearance branches, bridges, and parking garages can affect the load** All cargo will affect the vehicle's driving behavior. Never drive with any lock, knob, or rack in an open or unlocked position. All long loads such as, but not limited to sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks, of the vehicle.
- Remove your rack accessories when they are not in use, before entering car washes, prior to taking in your vehicle for service, and whenever clearance may be an issue.
- All locks must be turned and moved periodically to insure smooth operation. Use graphite or similar dry lubricant to help this. Locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended for an extended period. Place at least one key in the glove compartment.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use load carriers and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity.
- Consult with your dealer if you have any questions regarding the operations and limits of this product. Review all instructions carefully.

CAUTION: USE ANTI-SEIZE LUBRICANT ON ALL SCREWS

GOBI JL SKY ONE ROOF RACK MINI WIND DEFLECTORS INSTALLATION INSTRUCTIONS

Included in kit

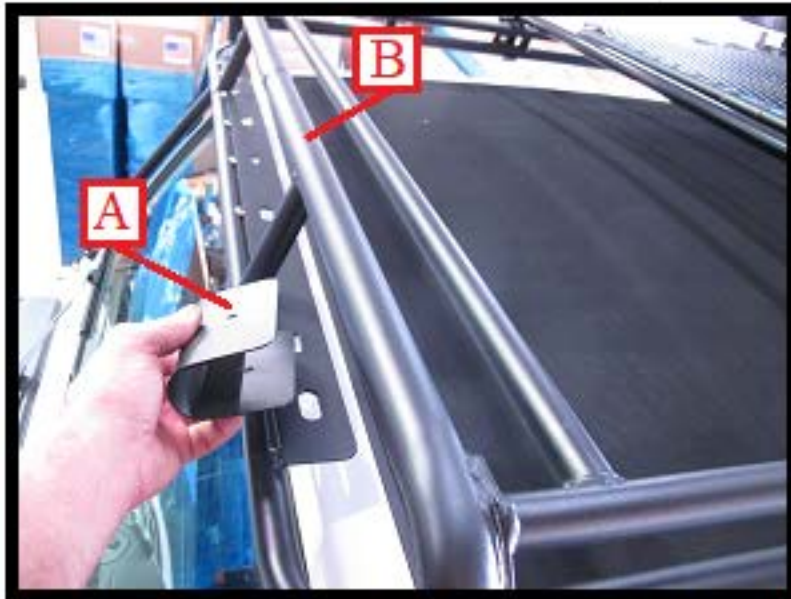
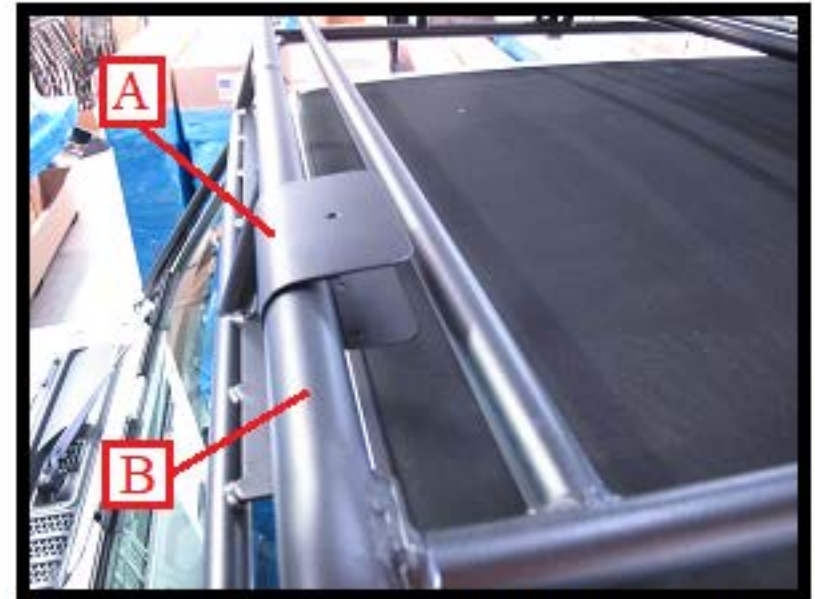
Letter	Description	Location	Quantity
A	Jeep JL Sky One Mini Wind Deflectors	Main box	4
B	HARDWARE LIST 4- 1/4-20 x 2" SS Button head screw 8- 1/4" SS flat washer 4- 1/4" SS nylock nut 8- Black nylon spacers #13RSSO207B	Pre-assembled to each wind deflector	4-sets

A

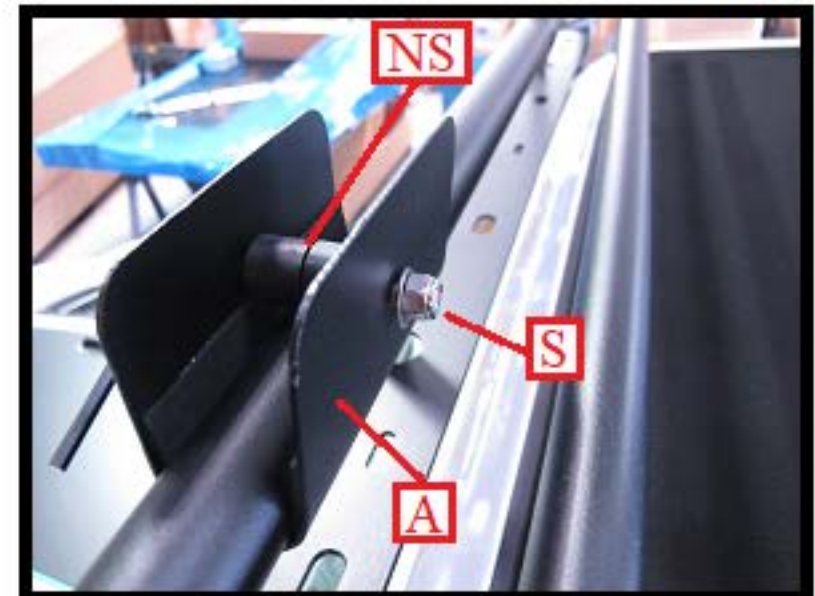


CAUTION: USE ANTI-SEIZE LUBRICANT ON ALL SCREWS

GOBI JL SKY ONE ROOF RACK MINI WIND DEFLECTORS INSTALLATION INSTRUCTIONS

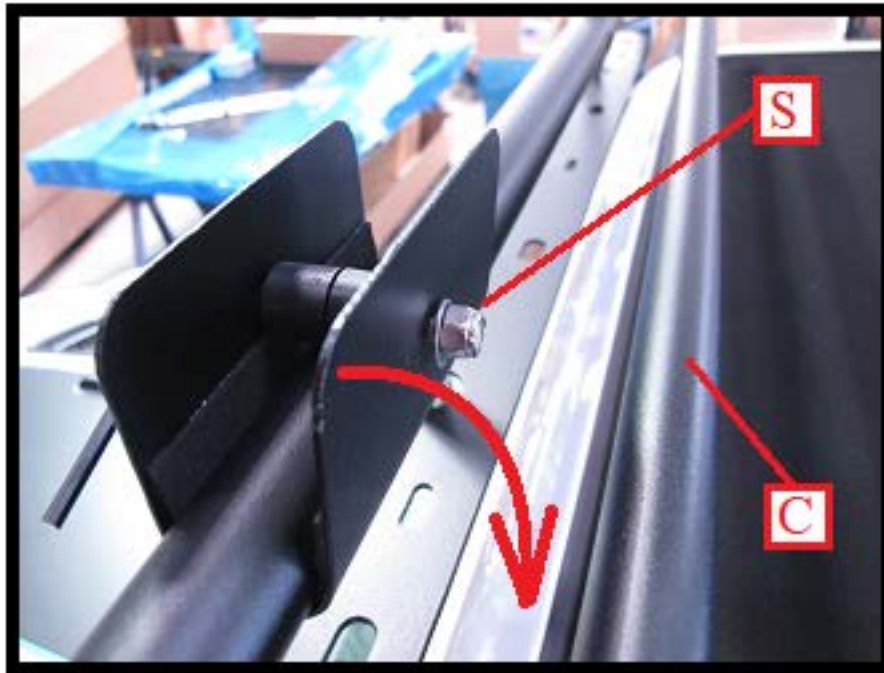
Fig. 1**Fig. 2**

As shown in Fig. 1 remove all hardware from each mini wind deflector (A) and place near by as they will be needed shortly. Slip mini wind deflector (A) over the top bar of light bar (B) as shown in Fig. 2.

Fig. 3**Fig. 4**

As shown in Fig. 3 position blades of mini wind deflector (A) up and slip 1- 1/4-20 x 2" button head screw (S) partially through wind deflector. Then slip onto screw (S) between wind deflector blades 2- black nylon spacers (NS) shown in Fig. 3 and Fig. 4. Finally add 1- 1/4" flat washer and 1- 1/4" nylock nut to the end of screw (S) shown in Fig. 4. Tighten screw and nut using a 5/32" Allen wrench and 7/16" open or closed end wrench. Tighten until spacers come together and cannot move. Do not over tighten.

GOBI JL SKY ONE ROOF RACK MINI WIND DEFLECTORS INSTALLATION INSTRUCTIONS

**Fig. 5**

After tightening screw (S), position mini wind deflector (A) down and in line with roof rack cross bar (C) as shown by the red arrow in Fig. 5 and in Fig. 6.

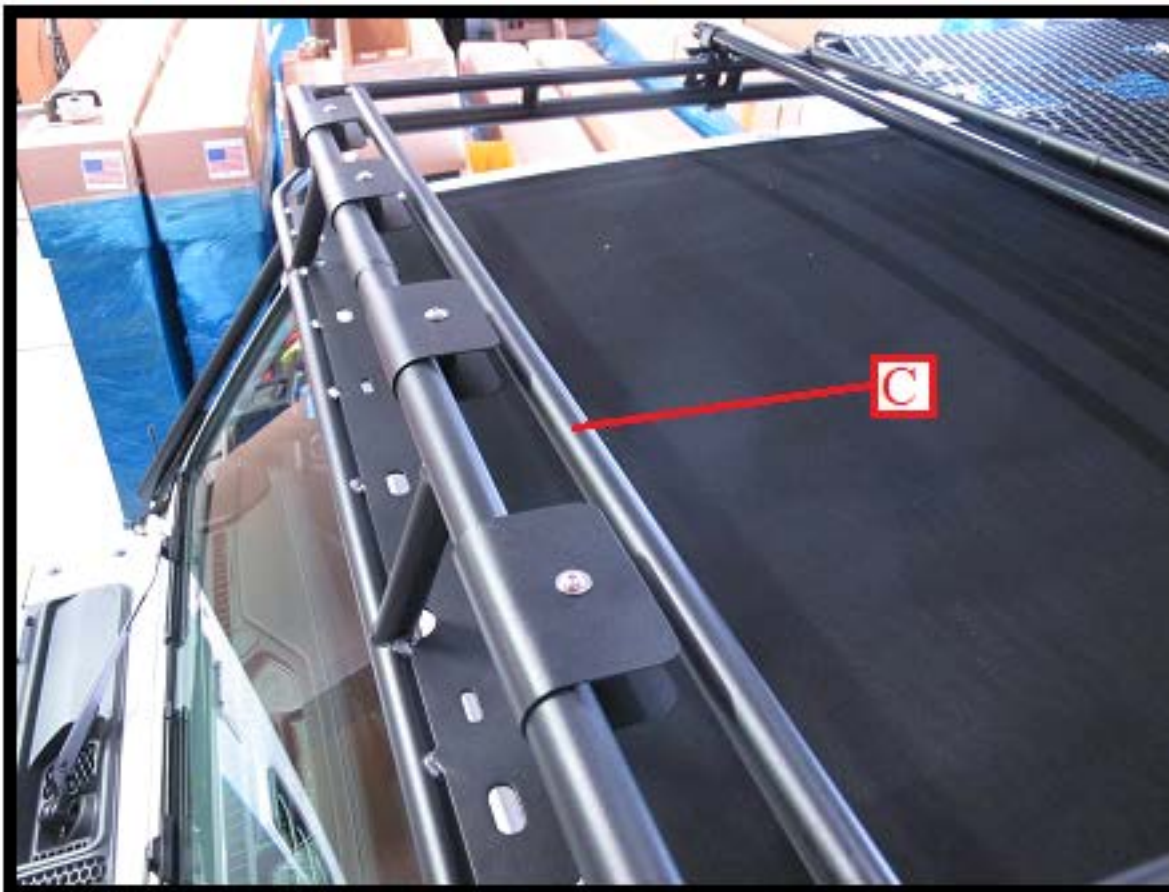
**Fig. 6**

Figure 6 illustrates all 4 Gobi Sky One mini wind deflectors installed level and positioned equally apart. This is considered a standard setting. Based on new potential equipment added such as LED light bars. The mini wind deflectors can be tilted up or down to re-direct air flow to reduce undesirable wind noise.

INSTALLATION COMPLETED