

# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK

## INSTALLATION INSTRUCTIONS

### Guidelines:

When using Load Carriers and Accessories, the user must understand the precautions. The points listed below will assist you in using the rack /carrier system and will encourage safety.

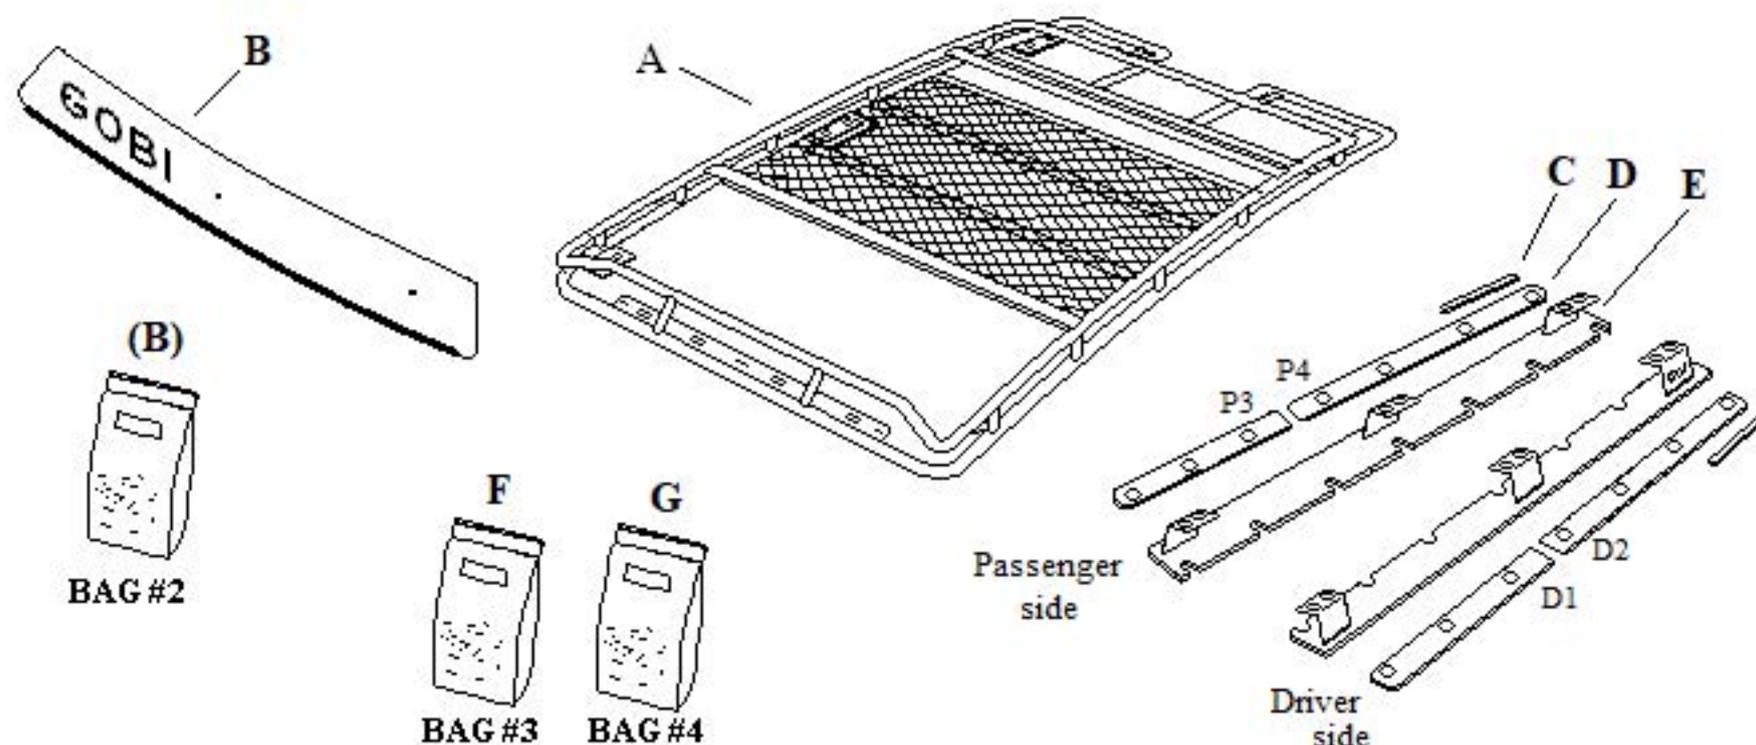
- For quality fits and safety, use only the recommended rack or accessory. Do not assume an accessory will fit, always check with dealer when obtaining new accessories. Use only approved accessories on load carriers. Using other brands will void your warranty.
- Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened and locked before every trip. Knobs, bolts, screws, straps, and locks must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during the trip to insure continued fastening security.
- Check local and state laws governing projection of objects beyond the width of a vehicle. **Be aware of the width and height of your cargo since low clearance branches, bridges, and parking garages can affect the load** All cargo will affect the vehicle's driving behavior. Never drive with any lock, knob, or rack in an open or unlocked position. All long loads such as, but not limited to sailboards, surfboards, kayaks, canoes, and lumber must be tied down front and rear to the bumpers or tow hooks, of the vehicle.
- Remove your rack accessories when they are not in use, before entering car washes, prior to taking in your vehicle for service, and whenever clearance may be an issue.
- All locks must be turned and moved periodically to insure smooth operation. Use graphite or similar dry lubricant to help this. Locks are designed to deter vandalism and theft. Remove valuable gear if your vehicle is unattended for an extended period. Place at least one key in the glove compartment.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use load carriers and accessories for purposes other than those for which they were designed. Do not exceed their carrying capacity.
- Consult with your dealer if you have any questions regarding the operations and limits of this product. Review all instructions carefully.

**CAUTION: USE ANTI-SEIZE LUBRICANT ON ALL SCREWS**

## GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK INSTALLATION INSTRUCTIONS

### Included in kit

Letter	Description	Location	Quantity
A	GOBI JEEP GRAND CHEROKEE WL 3 ROW ROOF RACK	Main box	
B	<p>WIND DEFLECTOR HARDWARE</p> <p><u>CONTENTS:</u></p> <p>1- Wind deflector black powder coated (strapped to roof rack)</p> <p>3- Wind deflector mounting brackets (inside Bag #2)</p> <p>1- Wind deflector clear wear strip packed in roll form (inside Bag #2)</p> <p>6- 1/4-20 x 3/4" Button head screws SS (inside Bag #2)</p> <p>12- 1/4" O.D. Black nylon round washers (inside Bag #2)</p> <p>6- 1/4" Nylock nuts SS (inside Bag #2)</p>	BAG #2 strapped to wind deflector	1
C, D, E	GOBI SUPPORT RAILS REAR PASSENGER & DRIVER SIDE	Hardware Box	2 ea.
F	<p>ROOF RACK MOUNTING BRACKET HARDWARE</p> <p><u>CONTENTS:</u> 14- M6 X 20mm SS button head mounting screws</p> <p>14- 1/4" SS lock washers</p> <p>14- 1/4" SS flat washer</p> <p>14- 1-1/4" SS neoprene washer</p> <p>1- M-4 Allen wrench</p> <p>1- T-30 Torx wrench</p>	BAG #3 Hardware Box	1
G	<p>GOBI RACK BRACKET HARDWARE</p> <p><u>CONTENTS:</u> 12- 3/8-16 X 1" SS Hex head screw</p> <p>24- 3/8" SS Flat washers</p> <p>12- 3/8" SS Nylock nuts</p> <p>6- Black rubber pads</p> <p>1- Anti-seize lubricant</p>	BAG #4 Hardware Box	1

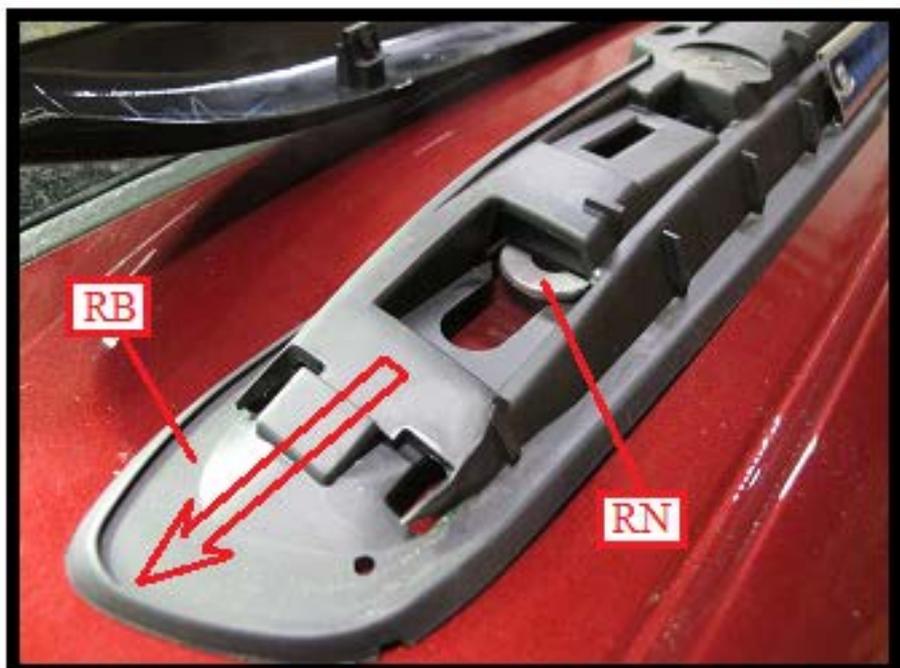


# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK

## INSTALLATION INSTRUCTIONS

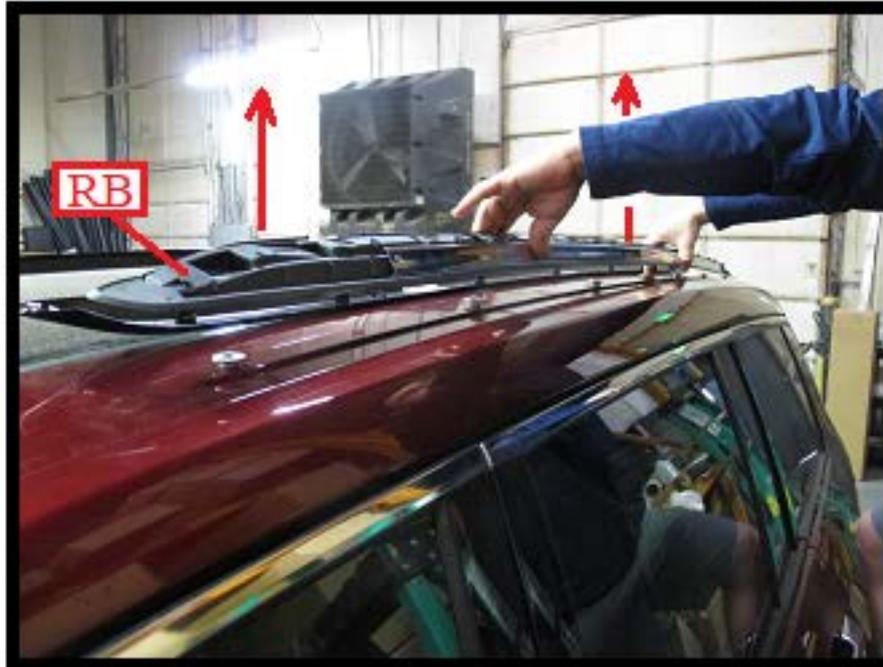
**Fig. 1****Fig. 2****Fig. 2a**

As shown in Fig. 1 and Fig. 2 by red arrows, pull up with force on the roof top rail cover (TC). Figure 2a, shows a close up of the top cover (TC) clips to better understand how the cover is held in place.

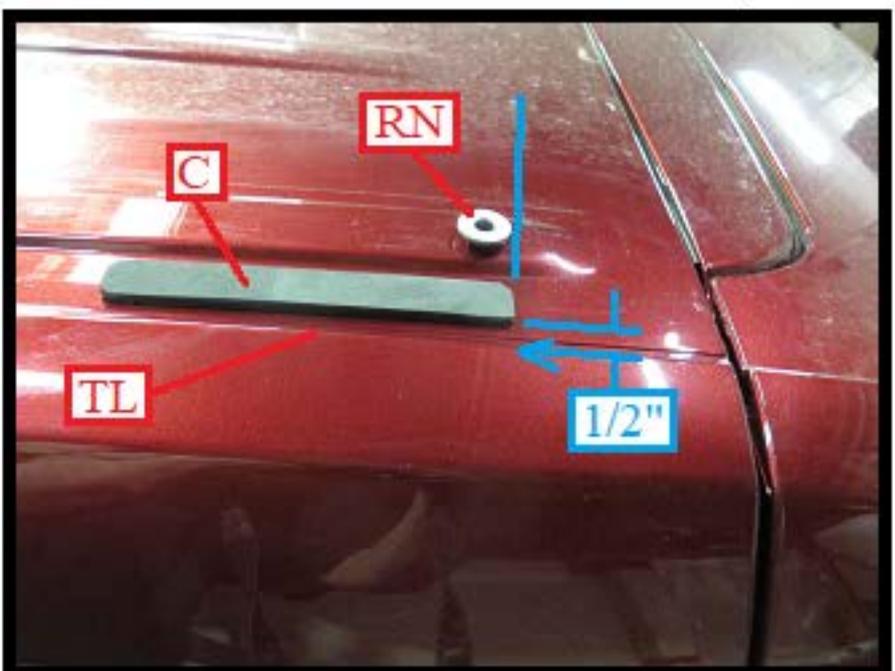
**Fig. 3****Fig. 4**

As shown in Fig. 3, use a #30 torx wrench and remove seven screws (S) from the roof top rail base (RB). Then as shown in Fig.4, slide rail base in the direction of the arrow towards the front of the vehicle, placing the roof top button head rivet nut (RN) in a position for the rail base (RB) to be lifted off the roof top.

## GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK INSTALLATION INSTRUCTIONS

**Fig. 5****Fig. 6**

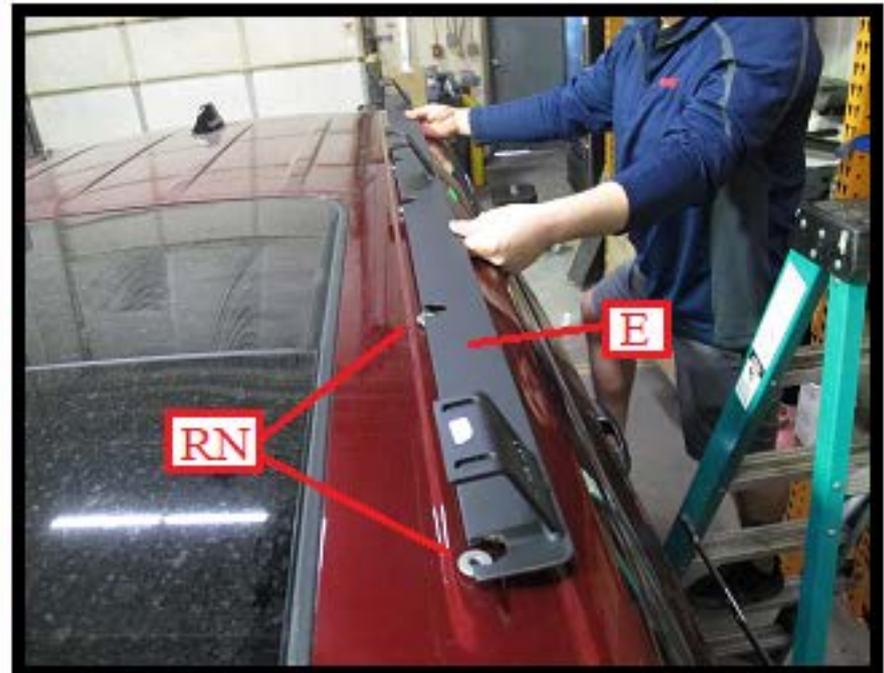
As shown in Fig. 5 by red arrows, lift up rail base (RB) and set aside as the rail base and cover are no longer required. Clean the roof top around the rivet nuts (RN) with a cleaner that is not harmful to paint in preparation for the next step.

**Fig. 7****Fig. 8**

As shown in Fig. 7, remove spacer plate (C) from your hardware kit, then remove the red double back tape protective covers (TP). As shown in Fig. 8, adhere spacer plate (C) to the roof top in line with the last rivet nut (RN) and approximately 1/2" from the edge of the trim line (TL) as shown in Fig. 8 by blue lines.

# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK

## INSTALLATION INSTRUCTIONS

**Fig. 9****Fig. 10**

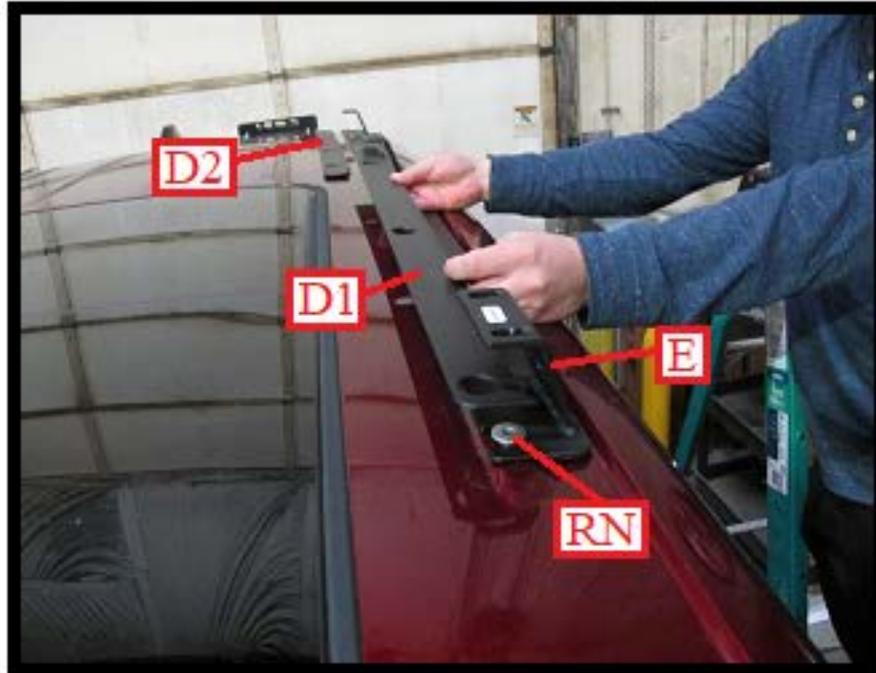
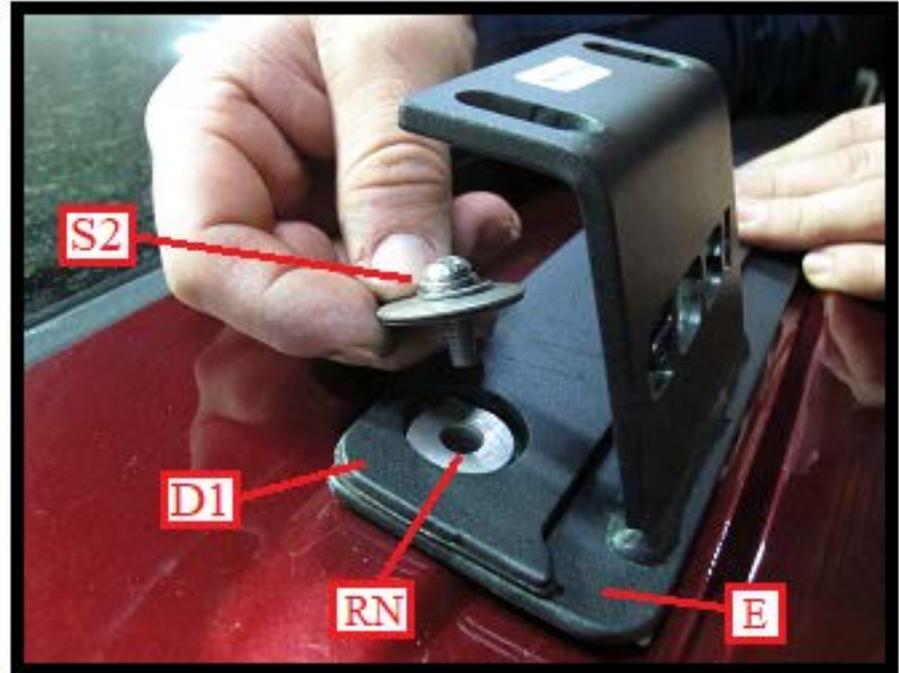
As shown in Fig. 9 and Fig. 10, place the driver side roof rack support (E) on the driver side roof top and line up with roof top rivet nuts (RN).

**Fig. 11****Fig. 12**

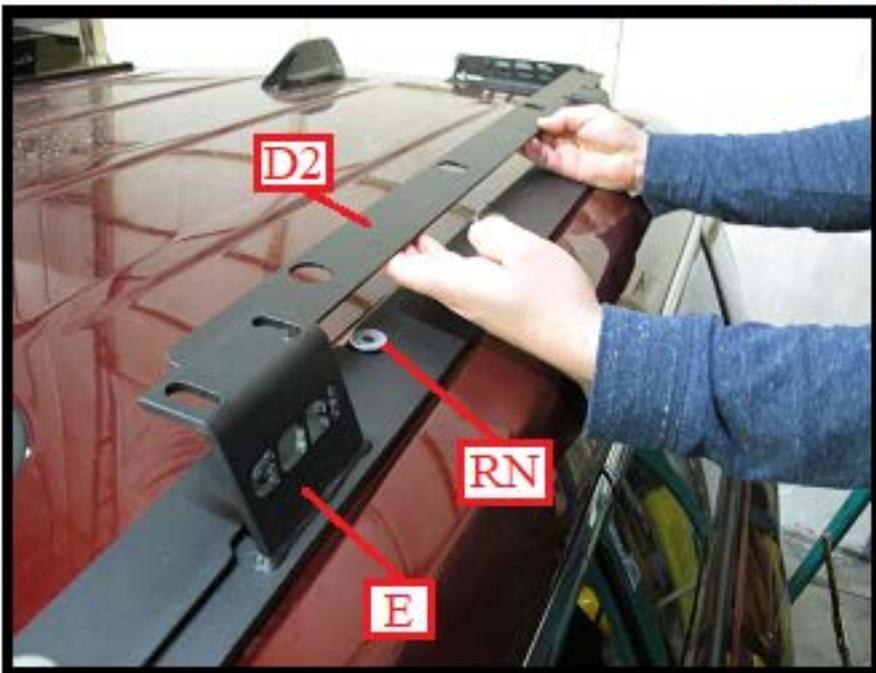
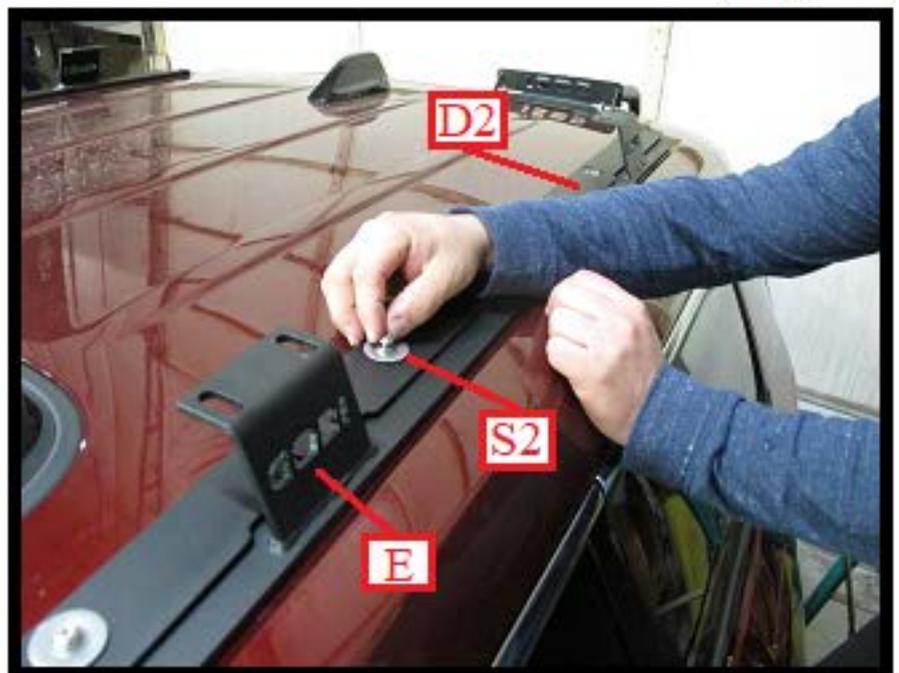
As shown in Fig. 11, once the driver side roof rack support (E) is in place over each rivet nut (RN), slide support bracket (E) under each rivet nut (RN) as shown in Fig. 12 in the direction of the red arrow.

# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK

## INSTALLATION INSTRUCTIONS

**Fig. 13****Fig. 14**

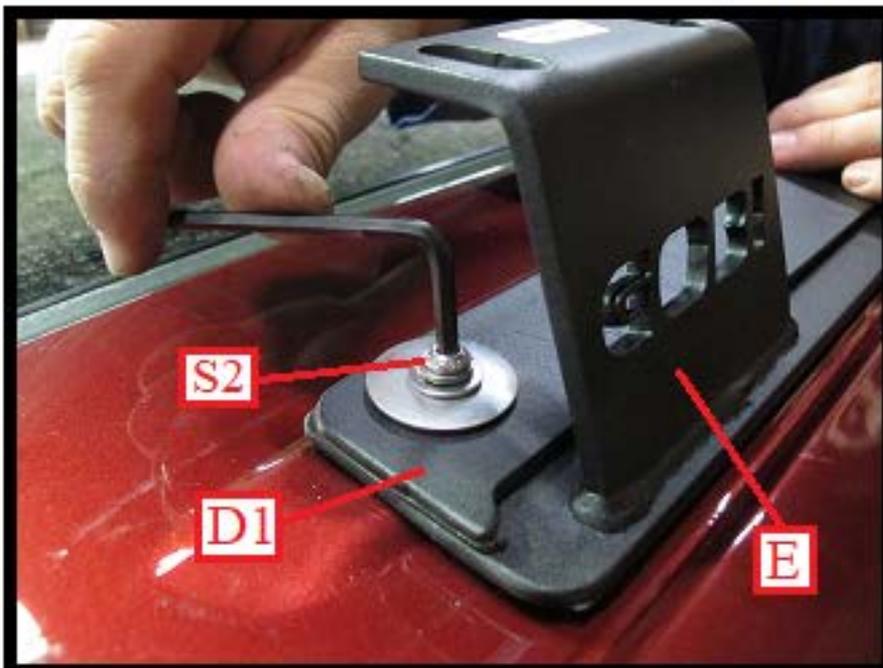
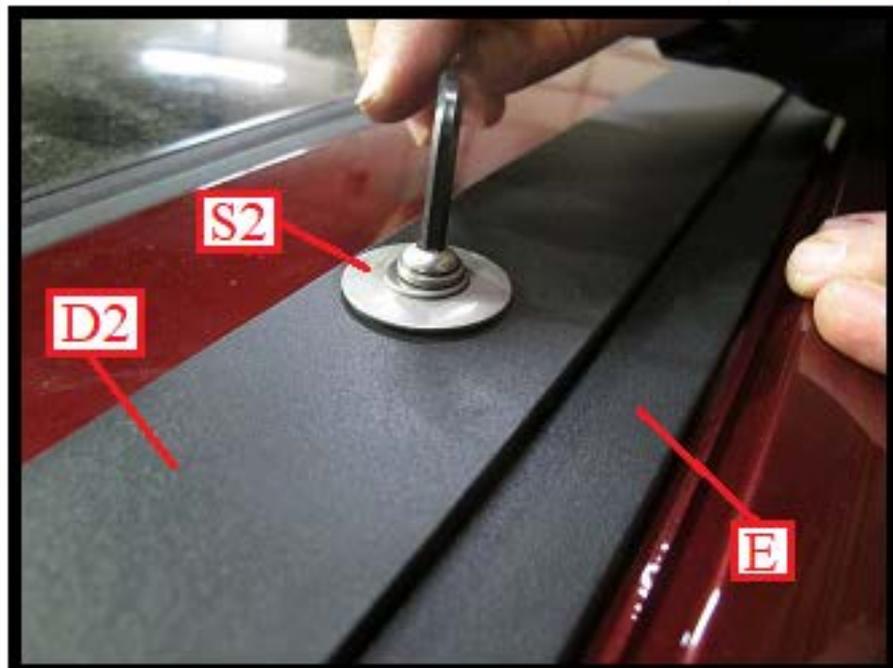
As shown in Fig. 13 and Fig. 14, place cover plate (D1) over the front Driver side section of support rail (E). Then as shown in Fig. 14, thread in place into rivet nut (RN) one M6 x 20mm button head screw, one 1/4" lock washer, one 1/4" flat washer and one 1-1/4" neoprene rubber backed washer (S2), located in Bag #3 of your hardware kit. Finger tighten all three screws holding cover plate (D1) in place.

**Fig. 15****Fig. 16**

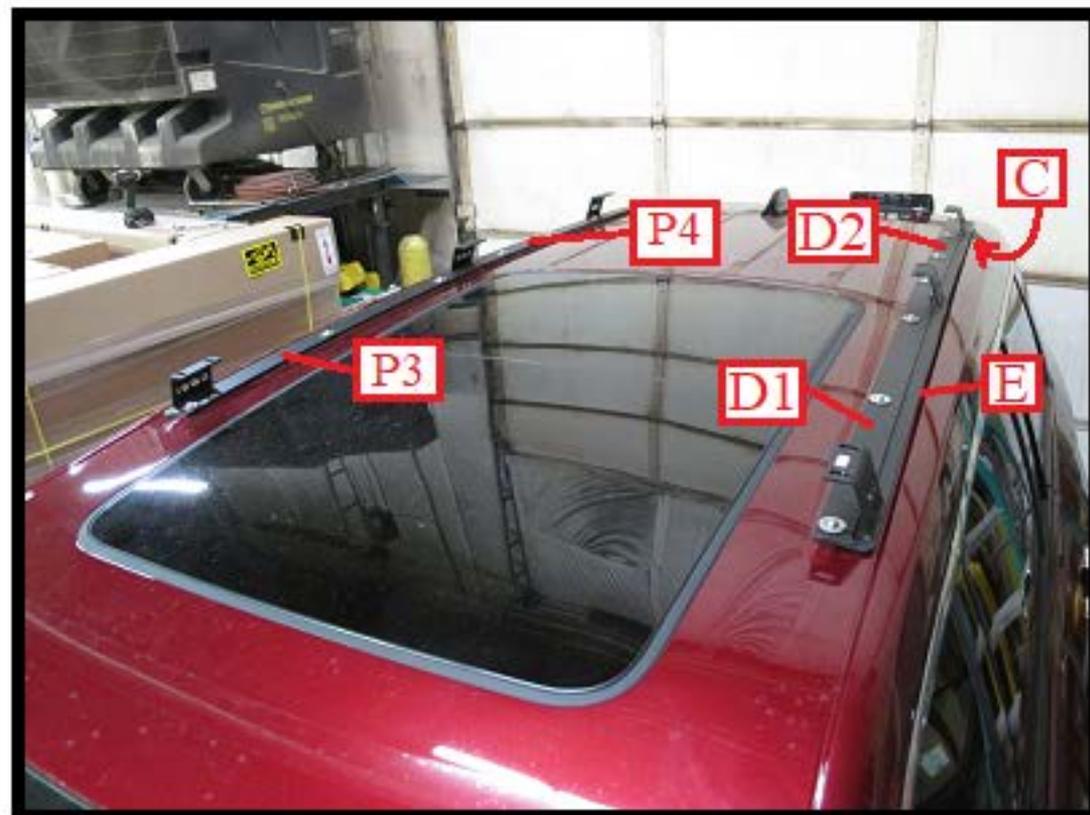
As shown in Fig. 15, place cover plate (D2) over the back section of Driver side support rail (E). Then as shown in Fig. 16, thread in place into all four rivet nuts (RN) one M6 x 20mm button head screw, one 1/4" lock washer, one 1/4" flat washer and one 1-1/4" neoprene rubber backed washer (S2). Finger tighten all four screws in place.

# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK

## INSTALLATION INSTRUCTIONS

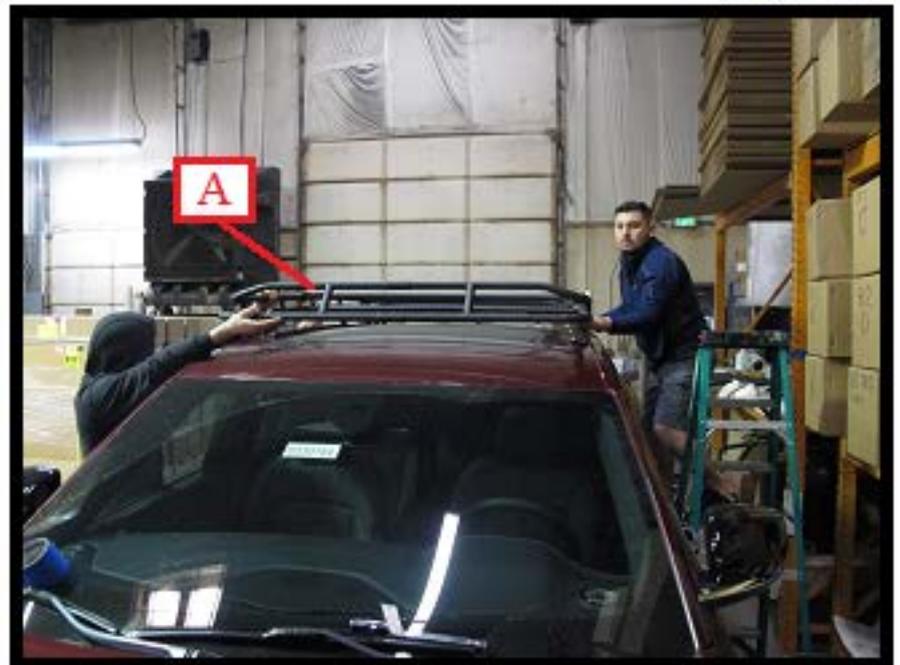
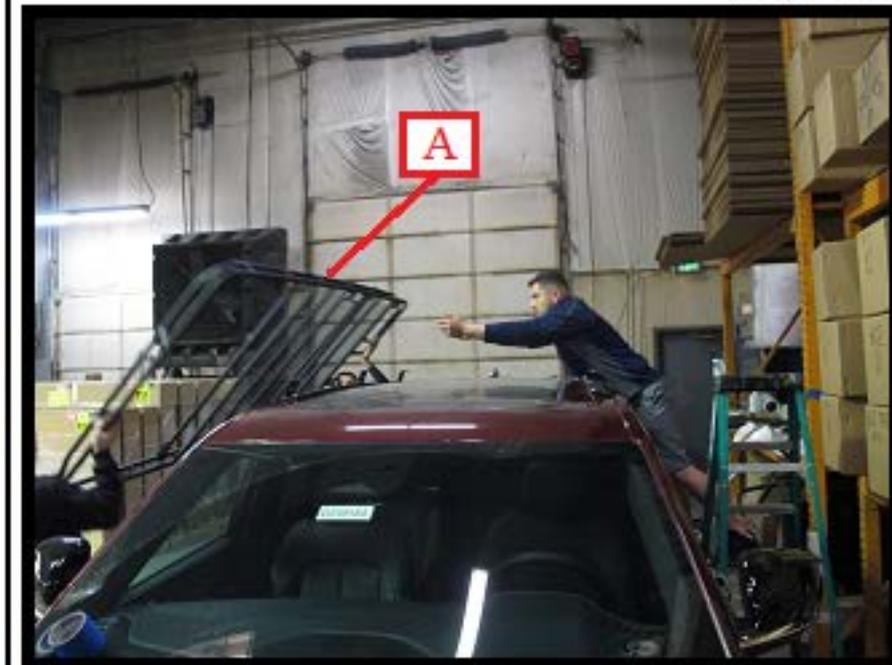
**Fig. 17****Fig. 18**

As shown in Fig. 17 and Fig. 18, fully tighten all seven screws (S2) using a 4mm Allen wrench supplied in Bag #3 of your hardware kit. Do not over tighten. Apply the same procedure to the passenger side.

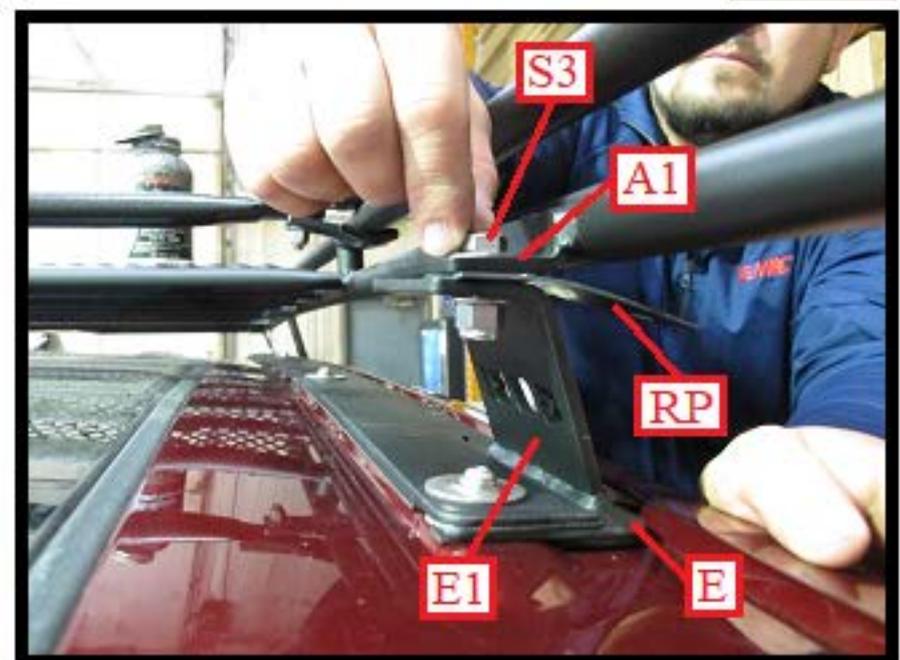
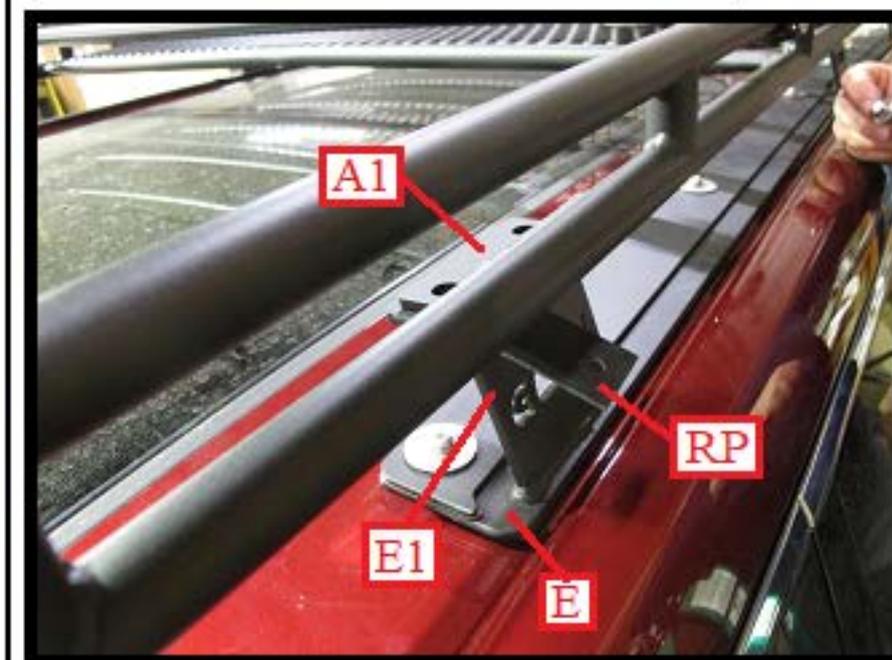
**Fig. 19**

As shown in Fig. 19, all roof rack Driver side and Passenger side rails (E), cover plates D1, D2, P3 and P4 are in place and secured ready for roof rack installation.

## GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK INSTALLATION INSTRUCTIONS

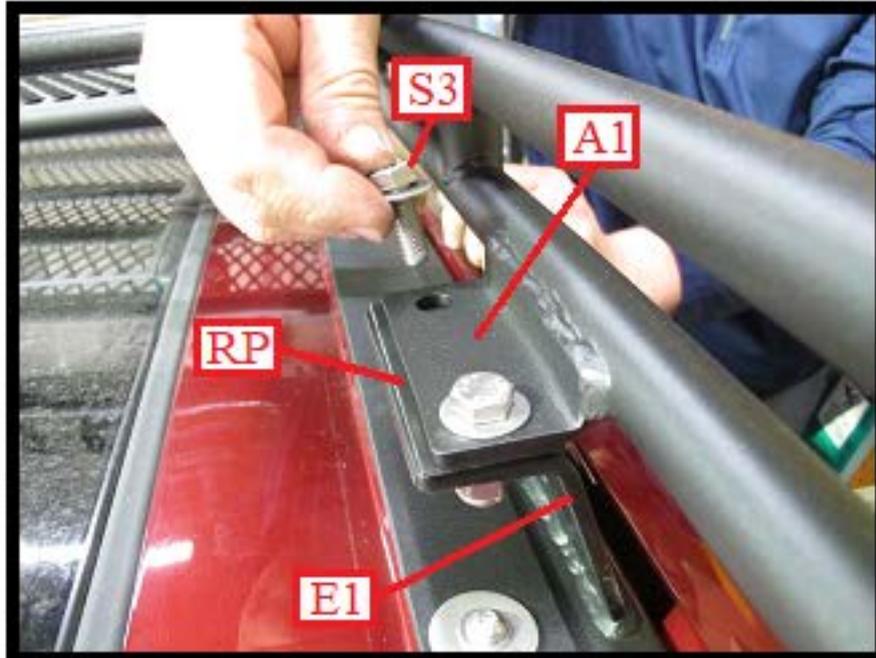
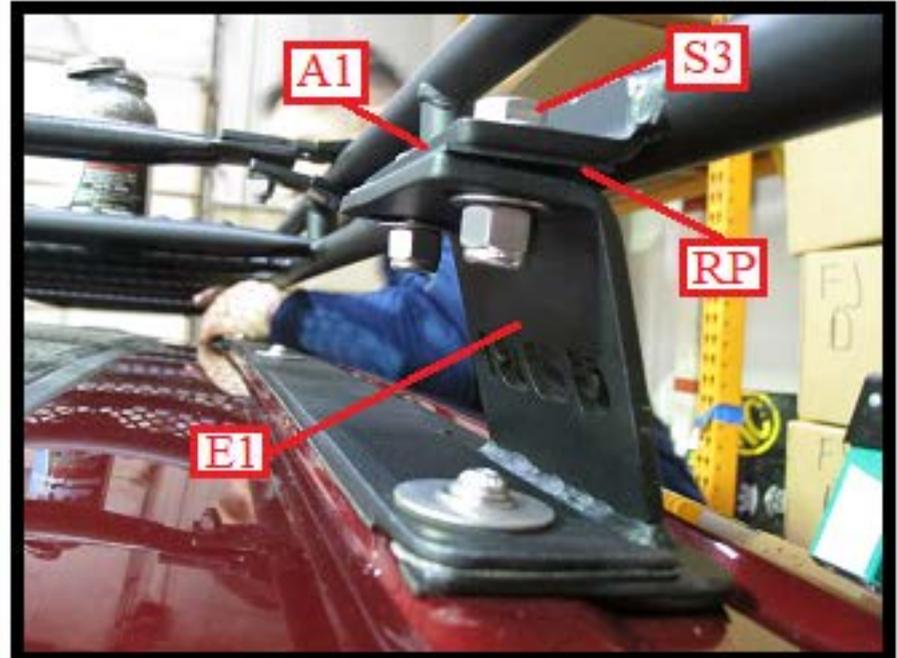
**Fig. 20****Fig. 21**

As shown in Fig. 20 and Fig. 21, with the help of two friends. Lift roof rack (A) onto all support rails (E) previously installed onto vehicle roof top.

**Fig. 22****Fig. 23**

As shown in Fig. 22, place one rubber pad (RP), located in Bag #4 of your hardware kit, between roof rack flange (A1) and support bracket (E1) on rail (E). Then as shown in Fig. 23, place one 3/8-16 x 1" hex head screw with one 3/8" flat washer (S3) into the top of flange (A1) through rubber pad (RP) then through support bracket (E1). Thread onto the underside one 3/8" flat washer and one 3/8" nylock nut also located in Bag #4. Finger tighten only at this time.

## GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK INSTALLATION INSTRUCTIONS

**Fig. 24****Fig. 25**

As shown in Fig. 24, swing rubber pad (RP) under the second hole in flange (A1) and place one 3/8-16 x 1" hex head screw with one 3/8" flat washer (S3) through flange (A1) and rubber pad (RP), then through support bracket (E1). As shown in Fig. 25, thread one 3/8" flat washer and one 3/8" nylock nut onto screw (S3) and finger tighten. Do not fully tighten at this time. Apply the same procedure to all five remaining support brackets.

**Fig. 26**

As shown in Fig. 26, after all screws (S3) have been installed. Fully tighten all screws (S3) using two open or closed end 9/16" wrenches. This will fully secure roof rack (A) to support brackets and rails (C, D1, D2, P3, P4 and E). To install the Gobi wind deflector, please refer to the Gobi wind deflector installation instructions located in hardware Bag #1, tied to wind deflector strapped to roof rack upon delivery.

# GOBI JEEP GRAND CHEROKEE WL 3RD ROW ROOF RACK INSTALLATION INSTRUCTIONS



**GOBI ROOF RACK INSTALLATION COMPLETED**

# INTELLIGENT DESIGNS 2000 CORPORATION

This limited one year warranty covers ONLY Intelligent Designs 2000, Corporation ("ID2000") products. Please review the terms and conditions of the limited warranties below.

## LIMITED ONE YEAR WARRANTY

All warranties and representations, except as set out below, are hereby disclaimed, (including fitness for the purchaser's intended use or purpose and merchantability), all products being sold AS IS, without warranty beyond that made herein, with the purchaser assuming: 1) the entire risk as to the quality and performance of the goods, 2) the cost of any repairs not covered herein.

Intelligent Designs 2000 Corporation warrants, as limited herein, to the original purchaser that its product which have been properly installed per provided instructions are free from defects in material and/or workmanship. At Intelligent Designs 2000 option, the purchaser's remedy hereunder shall be limited to repair or replacement of defective parts returned to the place of purchase or to Intelligent Designs 2000 at the purchaser's expense.

Intelligent Designs 2000 warranty, as herein, shall only be effective while the original purchaser owns the vehicle on which the product or product was installed and shall not apply if the product has been removed from the original vehicle. Intelligent Designs 2000 warranty is void if any damage to the product or products is due to misuse, abuse, neglect, accident, improper installation, or contact with on-road or off-road hazards, product modification, improper or inadequate maintenance or any use contrary to the instructions accompanying the product. Intelligent Designs 2000 warranty only covers the cost of the defective part and not the cost of removal, installation, and painting or other incidental or consequential charges or damages, or personal injury damages, and does not cover use of any product on racing vehicles. Intelligent Designs 2000's warranty is not transferable from the original purchaser.

## THIS LIMITED WARRANTY DOES NOT APPLY TO:

1. Damages or problems that result from shipping, installation, maintenance, or separate system components.
2. Damages or problems that result from misuse, abuse, operation outside environmental specifications or contrary to the requirements or precautions in the installation instructions, accident, lightning strikes or other natural causes, unauthorized modification or alteration, incorrect electrical current or voltage, other causes not arising out of defect in material or workmanship.
3. Therefore, the cost of repair or replacement of such defective product shall be borne by the customer.

To assure product quality, Intelligent Designs 2000 reserves the right to change product designs, materials, specifications and finishes with out prior notice to customers. Intelligent Designs 2000's warranty gives you specific legal rights and you may also have other rights, which vary from state to state. Some states do not limitations on how long an implied warranty lasts, so the above limitations may not apply to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitations or exclusions may not apply to you. Intelligent Designs 2000 reserves the right to discontinue product lines and substitute products or provide other remedies other than those listed in the limited warranty for those discontinued products.

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT ANY IMPLIED WARRANTY IS REQUIRED BY LAW, IT IS LIMITED IN DURATION TO THE EXPRESS WARRANTY PERIOD ABOVE. INTELLIGENT DESIGNS 2000 CORPORATION/ GOBI RACKS USA WILL NOT BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, OR INCIDENTAL DAMAGES OF ANY KIND INCLUDING LOSS OF REVENUES OR PROFITS, IN CONNECTION WITH THE PRODUCTS. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

## REQUESTING WARRANTY COVERAGE

For this warranty to be effective, it is strongly recommended that the purchaser completes and returns the warranty registration to Intelligent Designs 2000 within ten days of the date of purchase. Replacement parts can be obtained by returning the part along with proof of purchase. Warranty claims cannot be determined until the merchandise is received and inspected. **Returns made to Intelligent Designs 2000 will not be accepted without prior authorization from Intelligent Designs 2000. This included but is not limited to all shipping costs and all other incidental costs to be paid by the customer. Please call the customer service department at the number below.**

## LIMITED LIABILITY WARRANTY

Intelligent Designs 2000 Corporation warrants this product to be free of original defects in materials or workmanship as long as the original purchaser owns the motor vehicle on which it is installed. This warranty does not cover damage resulting from accident, misuse or abuse, neglect, lack of reasonable care, or improper installation. The Company will repair or replace, at its option, any product covered by this warranty that becomes defective. This is a parts-only warranty and such repair or replacement shall be the Company's sole obligation and the customer's sole remedy for a defective product. The Company shall have no liability for personal injury, property damage, incidental, or consequential damages of any kind or nature. **THIS FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND THE COMPANY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

To obtain warranty service, return this portion to Intelligent Designs 2000 Corporation with a proof of purchase to the address below. Please include:

First Name \_\_\_\_\_ Last Name \_\_\_\_\_  
Address \_\_\_\_\_ City \_\_\_\_\_  
E-mail \_\_\_\_\_ State \_\_\_\_\_  
Phone Number \_\_\_\_\_ Zip Code \_\_\_\_\_